

HDMI v2.0 Ultra-HD/4K Switch 5x1 (5 inputs, 1 output)

With this product you can connect 5 UltraHD/4K source devices (i.e., notebook, PlayStation, BluRay player) to 1 UHD/4K display (i.e., TV or projector). It is fully compatible with HDMI 2.0 devices.

Installing this product

- Connect at least one source (i.e., notebook, Blu-Ray player) with INPUT1, INPUT2, INPUT3, INPUT4 or INPUT5 with a high quality HDMI cable.
- Connect the display (i.e., TV or projector) to OUTPUT1 with a high quality HDMI cable.
- Connect the device to a power source with the adapter
- Select the source you want to display with the SELECT button. You can also use the remote control.



Notes

- For 4K/30Hz using HDMI cables longer then 7.5m may cause display problems. If you need a longer cable, use iVisions GFC-4K Fiber Optic cables.
- For 4K/60Hz using HDMI cables longer then 3.0m may cause display problems. If you need a longer cable, use iVisions GFC-4K Fiber Optic cables.
- The L1-L5 LED lights show which source is selected
- It is not recommended to change the settings while playing content. This will interrupt the playback for approximately 10 seconds.

Specifications

HDMI version	HDMI 2.0a	Max input cable length	3.0m (4K/60Hz) / 7.5m AWG24 HDMI cable
HDMI resolution	up to 4K / 60Hz	Max Output cable length	3.0m (4K/60Hz) / 7.5m AWG24 HDMI cable
Max bandwidth	600MHz	Max working current	650mA
Max band rate	18.0Gbps	Power adapter input	AC(50/60Hz) 100V-240V
Video color format	24/30/36 bit deep color	Power adapter output	DC 5V/1A
Operating Humidity range	5 to 90% RH	Operating Temperature	-15C to +55C
HDMI v2.0 inputs	5	Dimensions	178mm x 58mm x 20mm
HDMI v2.0 outputs	1	Weight	225g

HDMI Switch USW510

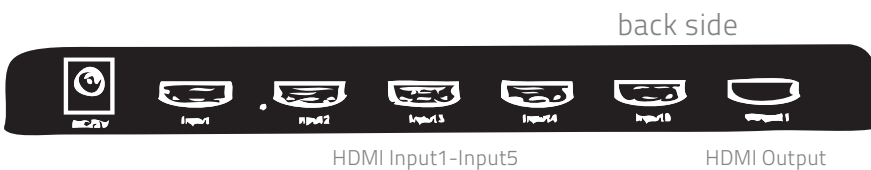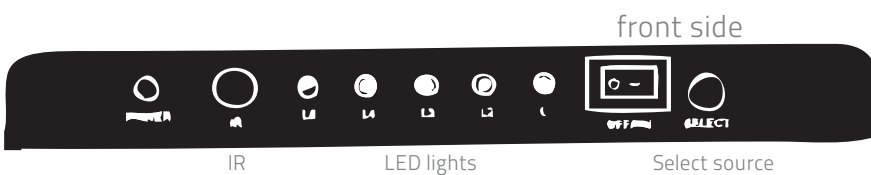

Included

- 1x HDMI Switch USW510
- 1x Remote Control
- 1x Power adapter