



PROJECTOR LS860WU


Key Features

- 5000 ANSI-lumen voor heldere beelden in elke omgeving
- Laserfosfortechnologie van de 2e generatie met een levensduur van 20.000 uur
- 0,81-0,89 short-throw ratio zonder veel ruimte gebruik
- Brede H / V-lensverschuiving voor flexibele installatie
- Creatieve vrijheid door 360 ° projectie- en portretmodus



Product Description

ViewSonic LS860WU is een geavanceerde 5000 ANSI-lumen WUXGA short-throw-installatieprojector. Door gebruik te maken van de 2e generatie laserfosfortechnologie biedt het een hoge en consistente helderheid voor een betrouwbare lichtbron van 20.000 uur. Short-throw ratio, 1,1x optische zoom, brede lensverschuiving, 360° projectie en portretmodus bouwen samen verbazingwekkende flexibiliteit op om een overweldigend meeslepende ervaring te creëren, vooral ideaal voor het combineren van projectietoepassingen in simulatie- en belevingscentra, restaurants en sportscholen. Daar komt nog bij dat het compacte formaat en de ingebouwde HDBaseT zorgen voor de gewenste kosteneffectiviteit.

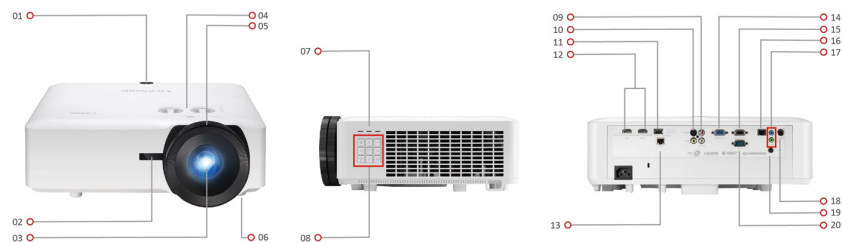

1. Power Key & IR
2. Front IR
3. Lens
4. Lens Shift Control Knob
5. Zoom/Focus Ring
6. Adjustment Foot
7. LED Indicator

8. Keypad
9. Composite
10. S-Video
11. USB Type A (5V/1.5A)
12. HDMI x 2
13. HDBaseT
14. Computer In

15. Monitor Out
16. LAN
17. Audio in & Out
18. 3D VESA
19. 12V Out
20. RS-232

Visit Us  www.viewsonic.com

SPECIFICATION

Native Resolution:	1920x1200
DMD Type:	DC3
Brightness:	5000 ANSI Lumens
Contrast Ratio:	3000000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Laser Phosphor system
Light Source Life (Normal):	up to 20000
Lamp Watt:	Nichia 67W x2
Lens:	F=1.83-1.86, f=9.6-9.4mm
Projection Offset:	0%
Throw Ratio:	0.81-0.89
Optical Zoom:	1.1X
Digital Zoom:	0.8x-2.0x
Image Size:	60"-200"
Throw Distance:	1.04-3.83m (100"@1.74m)
Keystone:	H: +/-40° , V: +/-40°
Lens Shift V. Range:	Yes (+50%, -50%)
Lens Shift H. Range:	Yes (+23%, -23%)
Audible Noise (Normal):	36dB
Audible Noise (Eco):	29dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA(1920 x 1200)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz
INPUT	
Computer in (share with component):	1
Composite:	1
S-Video:	1
HDMI:	2 (HDMI 1.4a/HDCP1.4 x2)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
3D VESA (Sync):	1
HDBaseT:	1
RJ45 Input:	1 (LAN control)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W x2
USB Type A (Power):	1 (5V/ 1.5A) (share with service)
12V Trigger (3.5mm):	1 (3.5mm)

CONTROL

RS232 (DB 9-pin male):	1
RJ45:	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 430W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	6.6kg
Dimensions (WxDxH) with Adjustment Foot:	405x305x145mm

OSD Language:

English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, total 23 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1 (w/ laser pointer)
QSG:	1

OPTIONAL ACCESSORY