

HDMI v1.4 Splitter 1x4 (1 input, 4 outputs)

With this product you can connect 1 source device (i.e., notebook, BluRay player) to 4 displays (i.e., TV, projector, monitor). It “copies” 1 source to 4 displays. For example, you can show a Powerpoint on 4 projectors or TV’s using 1 notebook with 1 HDMI output. You can also use it at the end of a longer HDMI cable to improve the signal.

Installing this product

- Connect the source (i.e., notebook, Blu-Ray player) with INPUT using a HDMI cable
- Connect at least one display (i.e., TV, projector, monitor) to OUTPUT1, OUTPUT2, OUTPUT3 or OUTPUT4 using HDMI cables
- Connect the device to a power source with the adapter


Notes

- This device does not have any buttons. It will always copy the source to all 4 outputs, which means no control or set-up is needed.
- The Output1-Output4 LED lights shows which displays are detected. The Input LED Light shows if a source is detected.
- It is not recommended to change the settings while playing content. This will interrupt the playback for approximately 10 seconds.

Specifications

| | | | |
|--------------------------|--------------------------------|-------------------------|-----------------------|
| HDMI version | HDMI 1.4b | Max input cable length | 15m AWG24 HDMI cable |
| HDMI resolution | up to 1080i/1080p (Full HD 3D) | Max Output cable length | 10m AWG24 HDMI cable |
| Max bandwidth | 340MHz | Max working current | 500mA |
| Max band rate | 3.2Gbps | Power adapter input | AC(50/60Hz) 100V-240V |
| Video color format | 8/10/12 bit deep color | Power adapter output | DC 5V/2A |
| Operating Humidity range | 5 to 90% RH | Operating Temperature | -15C to +55C |
| HDMI v1.4 inputs | 1 | Dimensions | 178mm x 66mm x 20mm |
| HDMI v1.4 outputs | 4 | Weight | 220g |

HDMI Splitter SP140

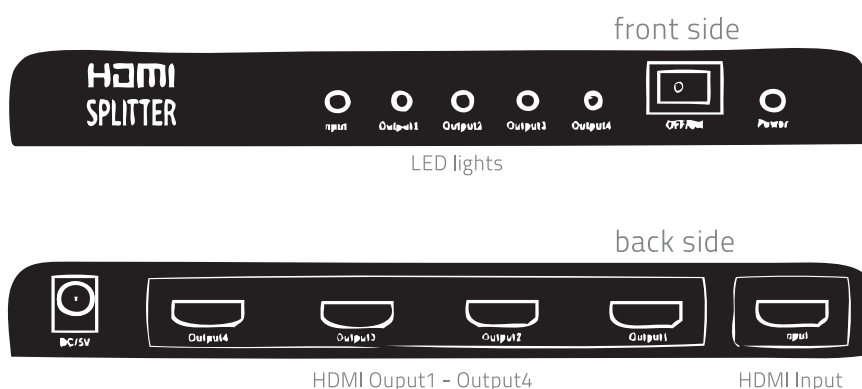

Included

- 1x HDMI Splitter SP140
- 1x Power adapter